

Installation Sheet **KSR1333**

Read these instructions before commencing installation & retain them for future reference.

IP67    **240V 10x 0.5W**

These fittings are Class II and do not require an Earth connection

Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Installation Procedure

Familiarize yourself with the luminaire and ensure the power is turned off before installing.

We recommend drilling a hole in a scrap piece of material before installing.

This kit is only suitable for decking installations.

Take time to check all factory glands are tight and seals are in place.

This kit is a plug and play system, cable should not be cut as this will invalidate the warranty.


Dress the main link cable under decking positioning each socket where the light will be installed.

Drill a 25mm hole in the decking and feed the plug through the hole and connect to main link cable, tighten locking ring.

Dress any excess cable through the hole and push the fitting into place.

Connect the mains supply. Ensure a suitable IP rated socket/connector is used.


These fittings are not suitable for ceiling/soffit applications and should only be installed as uplights.

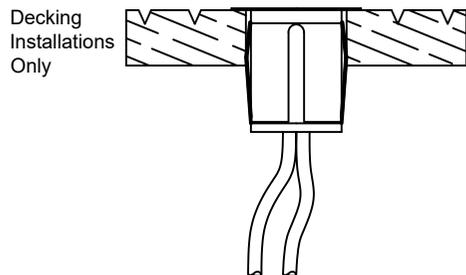

KSR Lighting Ltd, Unit E Hazleton Interchange, Lakesmere Road, Horndean, Hampshire, PO8 9JU

Cabello **10x 0.5W LED Deck Light Kit**

Available finish:- Stainless Steel

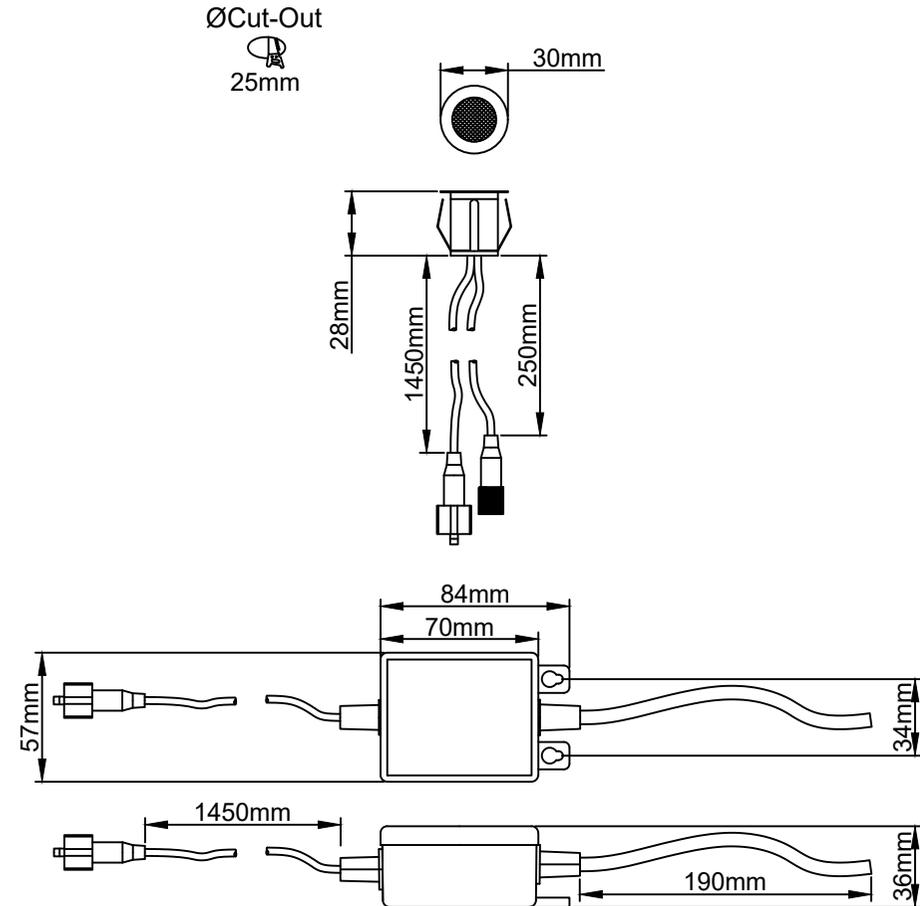

Lamp Details

KSR1333 - 10 x 0.5W Integral LED Module, Per Head
Non Replaceable
KSR1333W/W - 3000K Warm White
KSR1333C/W - 6000K Cool White

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com