

### LED EXIT BOX



### PRODUCT DESCRIPTION

Unlike traditional steel exit boxes that can be scratched and dented, this exit box is moulded from polycarbonate, so it will not scratch and cannot be dented, making it a winning choice for busy contractors.

### TECHNICAL DETAILS

- Light source: Front panel illuminated with 20 LEDs, Bottom panel illuminated with strip of 6 LEDs
- Colour temperature: 6,000K
- Batteries: 3 x NiMH cells, 3.6v, 2,000mAh
- Can be installed as:
  - Maintained, switchable or non-switchable
  - Non-maintained
  - Full details in instructions supplied
- Charge indicator lamp: Fitted
- Maximum viewing distance: 30m
- Insulation: Class II
- Input voltage: 220-240v, 50Hz
- Approvals: CE


### CONSTRUCTION

- Injection moulded white polycarbonate body
- Supplied complete with Euro arrow-down legend as shown. Up and left/right Euro legends supplied loose in carton
- Alternative (ISO7010) legends available as listed below

### ORDER CODES

<b>NLE3WES</b>	NLE3WES NEWLEC 5W LED M/NM E3 WALL EXIT BOX CW EURO LEGEND
<b>ALTERNATIVE LEGENDS</b>	
<b>NLE3WESILU</b>	NLE3WESILU NEWLEC ISO 7010 LEGEND ARROW UP FOR NLE3WES
<b>NLE3WESILD</b>	NLE3WESILD NEWLEC ISO 7010 LEGEND ARROW DOWN FOR NLE3WES
<b>NLE3WESILLR</b>	NLE3WESILLR NEWLEC ISO 7010 LEGEND ARROW L/R FOR NLE3WES

### DIMENSIONS

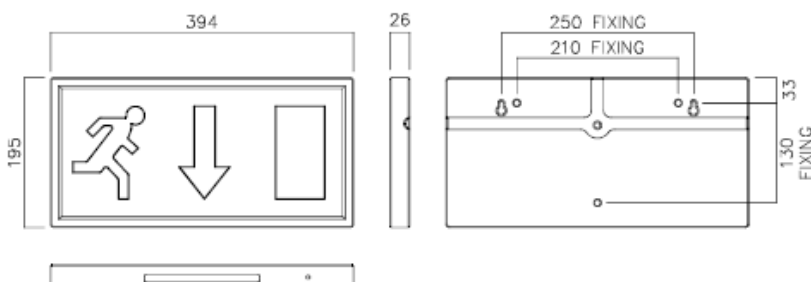

Date completed by manufacturer: 13 July 2015