


Trunking

Open Slot Trunking

Slotted trunking provides a neat and efficient means of supporting cables in switchgear, control cubicles etc. The open slot construction with tapered slots means that cables can be laid in an assembly wiring progresses, the lid being finally snapped in place to secure the installation.

When required, individual fingers forming the slots can be removed without the use of cutting tools to accommodate the larger cables or to permit butt joints between two trunking sections. Supplied in grey RAL7030.

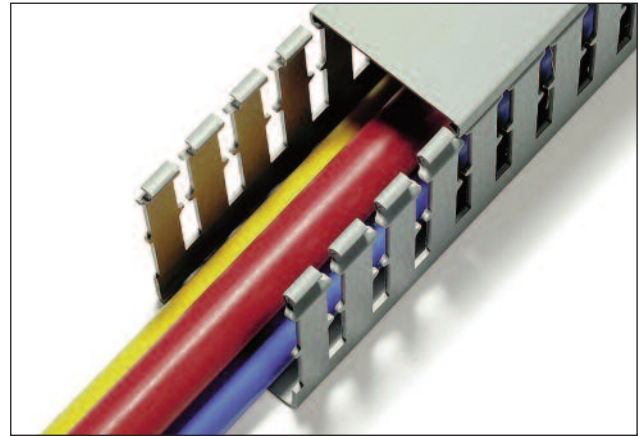

Open Slot Trunking.

Features and Benefits

- Made from rigid anti-shock pvc
- Flame and combustion resistant to DIN 4102 and ASTM D 635
- Mounting hole diameters to DIN 43659
- Plain and open slot versions supplied in grey
- Supplied in 2m lengths in standard or bulk packs
- Open and closed trunking CSA approved
- Narrow slot trunking available on request.
- Spare lids available on request

| TYPE | Section W x H | Pack Cont. | |
|--------|------------------|--------------|----------|
| | | Standard (m) | Bulk (m) |
| HTS1B | 25 x 25 | 10 x 2 | 150 |
| HTS2 | 30 x 30 | 10 x 2 | 120 |
| HTS3 | 25 x 40 | 10 x 2 | 100 |
| HTS4 | 40 x 40 | 10 x 2 | 72 |
| HTS5 | 60 x 40 | 10 x 2 | 48 |
| HTS5A | 80 x 40 | 10 x 2 | 60 |
| HTS5B | 100 x 40 | - | 32 |
| HTS5C | 30 x 50 | 10 x 2 | 100 |
| HTS5D | 50 x 50 | 10 x 2 | 60 |
| HTS6 | 25 x 60 | 10 x 2 | 64 |
| HTS7 | 40 x 60 | 10 x 2 | 48 |
| HTS8 | 60 x 60 | 10 x 2 | 32 |
| HTS9 | 80 x 60 | 10 x 2 | 48 |
| HTS10 | 100 x 60 | 4 x 2 | 32 |
| HTS12 | 25 x 80 | 10 x 2 | 42 |
| HTS13 | 40 x 80 | 10 x 2 | 60 |
| HTS14 | 60 x 80 | 10 x 2 | 48 |
| HTS14A | 80 x 80 | 4 x 2 | 36 |
| HTS15 | 100 x 80 | 4 x 2 | 24 |
| HTS16 | 120 x 80 | 4 x 2 | 24 |
| HTS17A | 40 x 100 | - | 40 |
| HTS17B | 60 x 100 | - | 32 |
| HTS18A | 80 x 100 | 4 x 2 | 24 |
| HTS19 | 100 x 100 | 4 x 2 | 16 |
| HTS20 | 150 x 100 | 4 x 2 | 12 |



When ordering standard packs please add STD to the part number eg. HTS2STD