


### Trunking

#### Open Slot Trunking

Slotted trunking provides a neat and efficient means of supporting cables in switchgear, control cubicles etc. The open slot construction with tapered slots means that cables can be laid in an assembly wiring progresses, the lid being finally snapped in place to secure the installation.

When required, individual fingers forming the slots can be removed without the use of cutting tools to accommodate the larger cables or to permit butt joints between two trunking sections. Supplied in grey RAL7030.

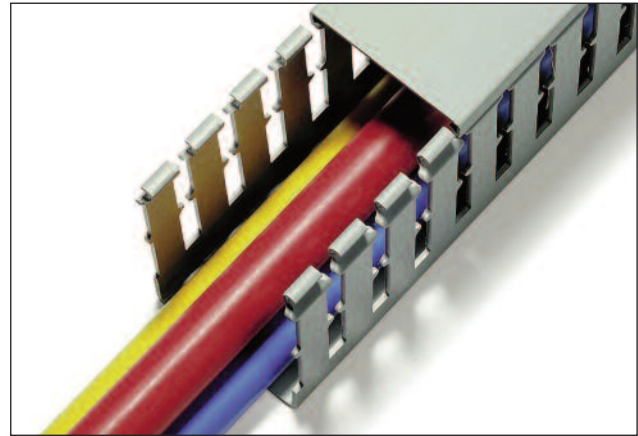

Open Slot Trunking.

#### Features and Benefits

- Made from rigid anti-shock pvc
- Flame and combustion resistant to DIN 4102 and ASTM D 635
- Mounting hole diameters to DIN 43659
- Plain and open slot versions supplied in grey
- Supplied in 2m lengths in standard or bulk packs
- Open and closed trunking CSA approved
- Narrow slot trunking available on request.
- Spare lids available on request

TYPE	Section W x H	Pack Cont.	
		Standard (m)	Bulk (m)
HTS1B	25 x 25	10 x 2	150
HTS2	30 x 30	10 x 2	120
HTS3	25 x 40	10 x 2	100
HTS4	40 x 40	10 x 2	72
HTS5	60 x 40	10 x 2	48
HTS5A	80 x 40	10 x 2	60
HTS5B	100 x 40	-	32
HTS5C	30 x 50	10 x 2	100
HTS5D	50 x 50	10 x 2	60
HTS6	25 x 60	10 x 2	64
HTS7	40 x 60	10 x 2	48
HTS8	60 x 60	10 x 2	32
HTS9	80 x 60	10 x 2	48
HTS10	100 x 60	4 x 2	32
HTS12	25 x 80	10 x 2	42
HTS13	40 x 80	10 x 2	60
HTS14	60 x 80	10 x 2	48
HTS14A	80 x 80	4 x 2	36
HTS15	100 x 80	4 x 2	24
HTS16	120 x 80	4 x 2	24
HTS17A	40 x 100	-	40
HTS17B	60 x 100	-	32
HTS18A	80 x 100	4 x 2	24
HTS19	100 x 100	4 x 2	16
HTS20	150 x 100	4 x 2	12



When ordering standard packs please add STD to the part number eg. HTS2STD