


# LED Flexi Strip-Light




Flexible LED strip-light, with a self-adhesive backing, can be attached to almost any surface. Suitable for indoor or outdoor applications. LED strip light can be cut at regular intervals for custom DIY applications.

- 20,000 hour life
- RGB, warm white or cool white colour options
- RGB driver kit includes infrared remote control and receiver with dimming, strobe and flash functions
- Class II
- IP65 rated
- Additional accessories include corner pieces and flexible connecting leads

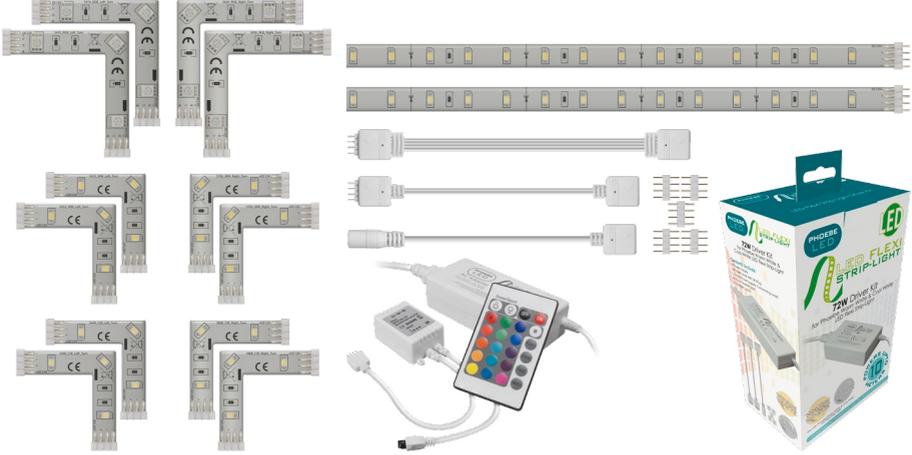

Product Code	Product Description	Watts (W)	Volts (V)	Colour Appearance	Colour Temp (K)	Total Lumens (lm)	Dimensions (mm)			Order Qty
							W	H	L	
<b>RGB LED Flexi Strip-Light 5 Metre Kit - Blister Pack</b>										
6386	5M LED Flexi Strip-Light Kit RGB Contents: 1x 30W AC power adapter, 1x infrared remote control, 1x infrared receiver, 1x power lead with UK plug, 2x 10cm flexible joints.	30	240	RGB			10	3	5000	1
7611	Accessory Pack For 5m Strip Kit RGB (6386) Contents: 1x 15cm power cable with clamp to one end and 2x 15cm flexible joints with clamps to both ends. Requires separate driver kit (5389)									
<b>RGB LED Flexi Strip-Light - Single Carton</b>										
5297	0.5M LED Flexi Strip-Light RGB (Requires Driver 5389)	3.6	12	RGB			10	3	500	1
5303	1.0M LED Flexi Strip-Light RGB (Requires Driver 5389)	7.2	12	RGB			10	3	1000	1
5310	2.0M LED Flexi Strip-Light RGB (Requires Driver 5389)	14.4	12	RGB			10	3	2000	1
<b>RGB LED Flexi Strip-Light Corners - Single Packet</b>										
5419	LED Flexi Strip-Light RGB Left Bend (Qty 2)	0.72	12	RGB			53	3	53	1
5426	LED Flexi Strip-Light RGB Right Bend (Qty 2)	0.72	12	RGB			53	3	53	1
<b>RGB LED Flexi Strip-Light Leads/Connectors - Single Packet</b>										
5518	10cm Flexible Joint RGB (Qty 2)						13.5	6.5	100	1
5525	50cm Flexible Joint RGB (Qty 2)						13.5	6.5	500	1
5402	Straight Joints						10	2.5	10	1
<b>RGB LED Flexi Strip-Light Driver - Single Carton</b>										
5389	RGB Driver Kit Contents: 1x AC power adapter 1x infrared remote control, 1x infrared receiver, 1x power lead with UK plug, 1x 20cm power supply connecting lead, 2x 10cm flexible joints, 5x straight joints.	72	240				53	33	119	1
<b>Warm White Flexi Strip-Light 5 Metre Kit - Blister Pack</b>										
6362	5M LED Flexi Strip-Light Kit WW Contents: 1x 30W AC power adapter, 1x power lead with UK plug, 2x 10cm flexible joints.	30	240	Warm White	3000	1800	10	3	5000	1
7604	Accessory Pack For 5m Strip Kit CW/WW (6362/6379) Contents: 1x 15cm power cable with clamp to one end and 2x 15cm flexible joints with clamps to both ends. Requires separate driver kit (5396)									
<b>Warm White LED Flexi Strip-Light - Single Carton</b>										
5327	0.5M LED Flexi Strip-Light WW (Req. Driver 5396)	3.6	12	Warm White	3000	180	10	3	500	1
5334	1.0M LED Flexi Strip-Light WW (Req. Driver 5396)	7.2	12	Warm White	3000	360	10	3	1000	1
5341	2.0M LED Flexi Strip-Light WW (Req. Driver 5396)	14.4	12	Warm White	3000	720	10	3	2000	1
<b>Warm White LED Flexi Strip-Light Corners - Single Packet</b>										
5433	LED Flexi Strip-Light WW Left Bend (Qty 2)	0.72	12	Warm White	3000	18	40	3	40	1
5792	LED Flexi Strip-Light WW Right Bend (Qty 2)	0.72	12	Warm White	3000	18	40	3	40	1
<b>Cool White LED Flexi Strip-Light 5 Metre Kit - Blister Pack</b>										
6379	5M LED Flexi Strip-Light Kit CW Contents: 1x 30W AC power adapter, 1x power lead with UK plug, 2x 10cm flexible joints.	30	240	Cool White	5500	1900	10	3	5000	1
7604	Accessory Pack For 5m Strip Kit CW/WW (6362/6379) Contents: 1x 15cm power cable with clamp to one end and 2x 15cm flexible joints with clamps to both ends. Requires separate driver kit (5396)									
<b>Cool White LED Flexi Strip-Light - Single Carton</b>										
5358	0.5M LED Flexi Strip-Light CW (Req. Driver 5396)	3.6	12	Cool White	5500	200	10	3	500	1
5365	1.0M LED Flexi Strip-Light CW (Req. Driver 5396)	7.2	12	Cool White	5500	380	10	3	1000	1
5372	2.0M LED Flexi Strip-Light CW (Req. Driver 5396)	14.4	12	Cool White	5500	740	10	3	2000	1
<b>Cool White LED Flexi Strip-Light Corners - Single Packet</b>										
5440	LED Flexi Strip-Light CW Left Bend (Qty 2)	0.72	12	Cool White	5500	19	40	3	40	1
5808	LED Flexi Strip-Light CW Right Bend (Qty 2)	0.72	12	Cool White	5500	19	40	3	40	1
<b>Warm White/Cool White LED Flexi Strip-Light Leads/Connectors - Single Packet</b>										
5457	10cm Flexible Joint WW/CW (Qty 2)						13.5	6.5	100	1
5464	50cm Flexible Joint WW/CW (Qty 2)						13.5	6.5	500	1
5402	Straight Joints						10	2.5	10	1
<b>Warm White/Cool White LED Flexi Strip-Light Driver - Single Carton</b>										
5396	WW/CW Driver Kit Contents: 1x AC power adapter 1x power lead with UK plug, 1x 20cm power supply connecting lead, 2x 10cm flexible joints, 5x straight joints.	72	240				53	33	119	1

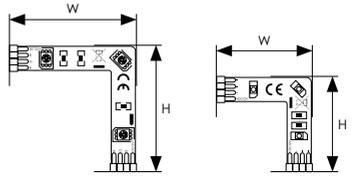

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

CROMPTON LAMPS

LED 874/2012

Experts in lighting since 1878